

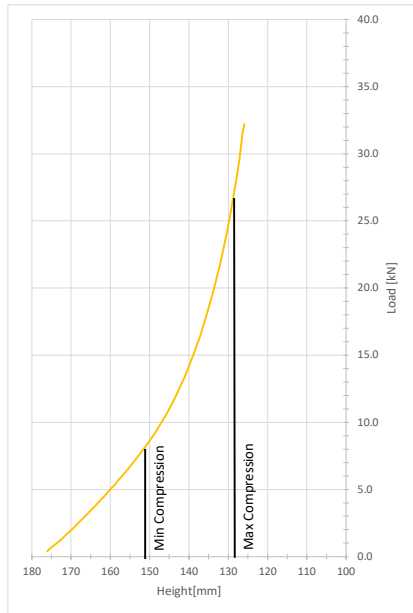


Continental SAM

DN 127 DH 178 IN 25



Compression [%]	15	20	22.5	25	27.5
Load [kN]	8.1	12.7	16.4	20.7	26.6
Height [mm]	151	142	137	133	129
Spring Rate [kN/m]	401	649	882	1194	1774
Effective Deflection [mm]	20	20	19	17	15
Natural Frequency [Hz]	3.5	3.6	3.7	3.8	4.1
Maximum OD [mm]	135	140	142	144	147
Weight [Kg]	2.13				

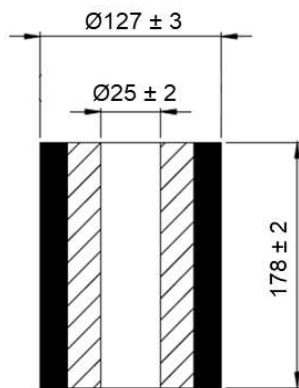

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)