

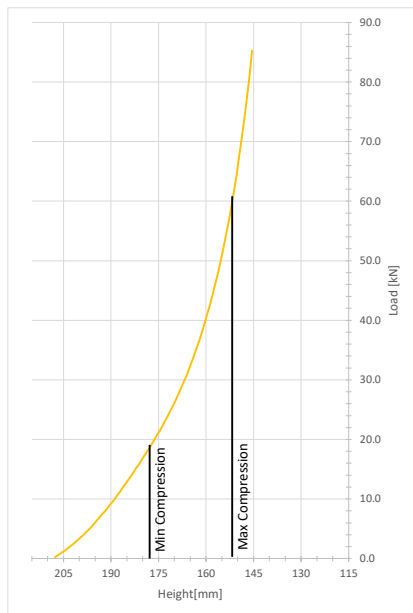


Continental SAM

DN 203 DH 203 IN 50



Compression [%]	15	20	22.5	25	27.5
Load [kN]	19.3	29.6	38.1	48.0	61.5
Height [mm]	177	167	161	156	151
Spring Rate [kN/m]	872	1262	1717	2306	3229
Effective Deflection [mm]	22	23	22	21	19
Natural Frequency [Hz]	3.4	3.3	3.4	3.5	3.6
Maximum OD [mm]	222	228	232	236	239
Weight [Kg]	6.29				

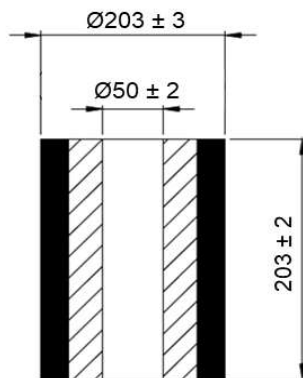

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)