

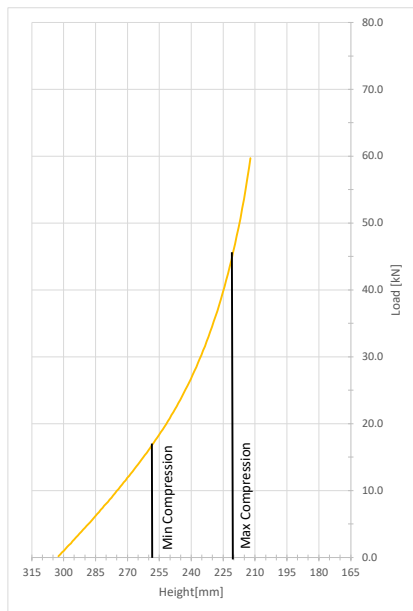


Continental SAM

DN 203 DH 305 IN 89



Compression [%]	15	20	22.5	25	27.5
Load [kN]	17.1	25.1	30.3	36.9	45.7
Height [mm]	258	243	235	228	220
Spring Rate [kN/m]	462	625	778	1009	1383
Effective Deflection [mm]	37	40	39	37	33
Natural Frequency [Hz]	2.6	2.5	2.5	2.6	2.8
Maximum OD [mm]	220	226	228	231	233
Weight [Kg]	7.90				

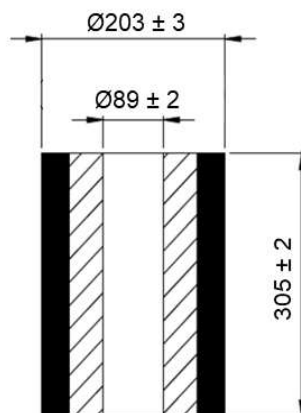

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)