

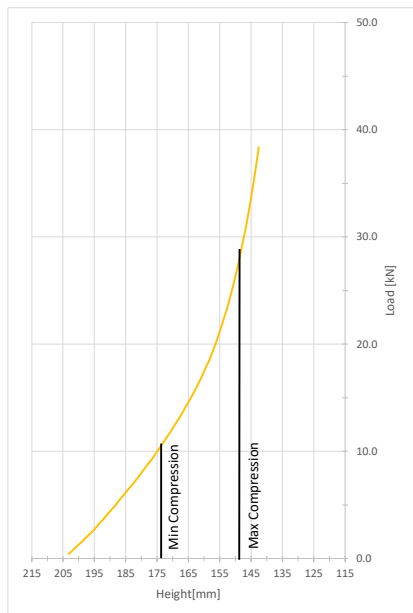


Continental SAM

DN 152 DH 203 IN 25



Compression [%]	15	20	22.5	25	27.5
Load [kN]	10.7	15.4	18.5	22.6	28.3
Height [mm]	173	163	158	153	148
Spring Rate [kN/m]	430	550	702	973	1372
Effective Deflection [mm]	25	28	26	23	21
Natural Frequency [Hz]	3.2	3.0	3.1	3.3	3.5
Maximum OD [mm]	160	164	167	170	172
Weight [Kg]	3.35				

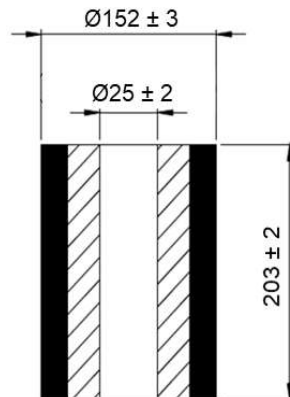

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)