

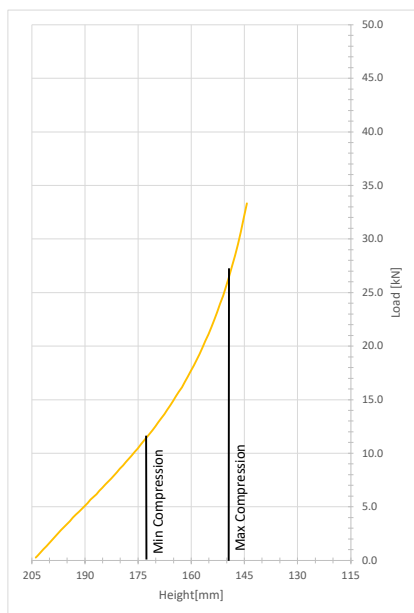


Continental SAM

DN 165 DH 203 IN 76



Compression [%]	15	20	22.5	25	27.5
Load [kN]	11.1	15.7	18.7	22.4	27.4
Height [mm]	173	163	158	154	148
Spring Rate [kN/m]	407	542	670	851	1187
Effective Deflection [mm]	27	29	28	26	23
Natural Frequency [Hz]	3.0	2.9	3.0	3.1	3.3
Maximum OD [mm]	178	182	184	186	189
Weight [Kg]	3.30				

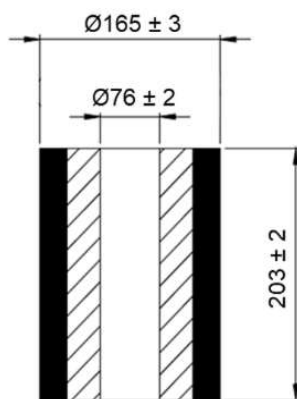

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)