

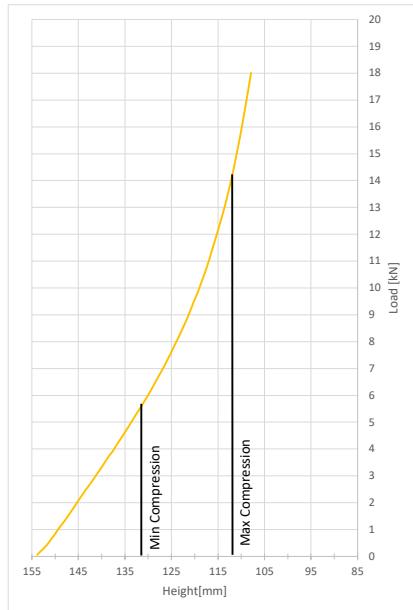


Continental SAM

DN 114 DH 152 IN 50



Compression [%]	15	20	22.5	25	27.5
Load [kN]	5.7	8.2	9.9	12.0	14.3
Height [mm]	131	123	119	115	112
Spring Rate [kN/m]	288	368	460	598	796
Effective Deflection [mm]	20	22	21	20	18
Natural Frequency [Hz]	3.5	3.4	3.4	3.5	3.7
Maximum OD [mm]	116	119	120	123	124
Weight [Kg]	1.17				

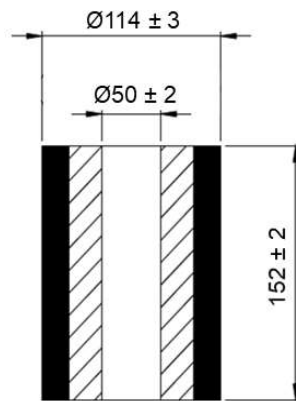

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)