

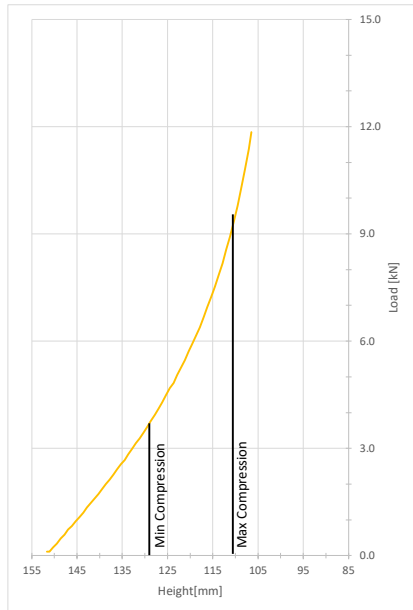


Continental SAM

DN 102 DH 152 IN 50



Compression [%]	15	20	22.5	25	27.5
Load [kN]	3.6	5.5	6.4	7.9	9.3
Height [mm]	129	121	118	114	110
Spring Rate [kN/m]	194	264	305	395	528
Effective Deflection [mm]	19	21	21	20	18
Natural Frequency [Hz]	3.7	3.5	3.5	3.5	3.8
Maximum OD [mm]	107	110	111	112	113
Weight [Kg]	0.89				

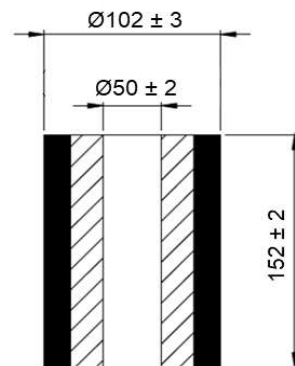

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)