

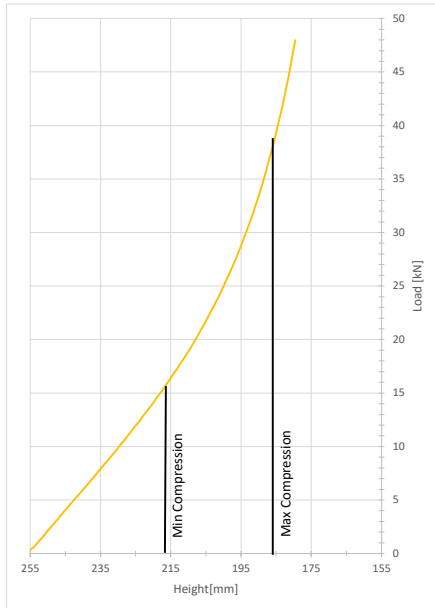


Continental SAM

DN 191 DH 254 IN 89



Compression [%]	15	20	22.5	25	27.5
Load [kN]	15.3	21.8	26.3	31.1	38.3
Height [mm]	217	205	198	192	186
Spring Rate [kN/m]	465	592	748	929	1284
Effective Deflection [mm]	33	37	35	34	30
Natural Frequency [Hz]	2.8	2.6	2.7	2.7	2.9
Maximum OD [mm]	207	213	215	217	220
Weight [Kg]	5.60				

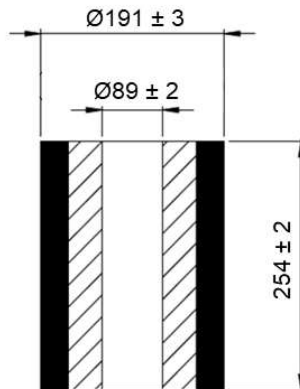

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)