

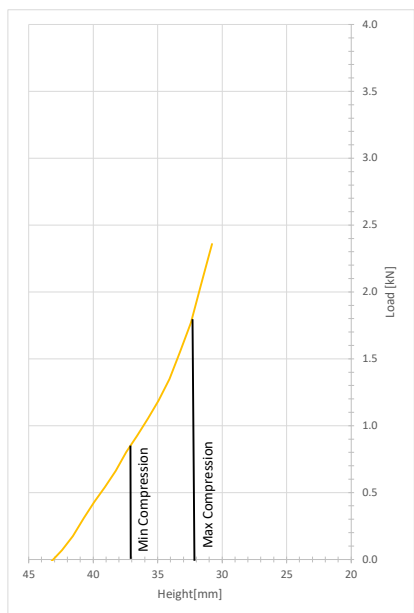


Continental SAM

DN 41 DH 44 IN 16



Compression [%]	15	20	22.5	25	27
Load [kN]	0.8	1.1	1.2	1.6	1.8
Height [mm]	37	36	35	33	32
Spring Rate [kN/m]	152	178	193	254	284
Effective Deflection [mm]	5	6	6	6	6
Natural Frequency [Hz]	6.9	6.5	6.4	6.4	6.3
Maximum OD [mm]	49	50	51	53	53
Weight [Kg]	0.06				

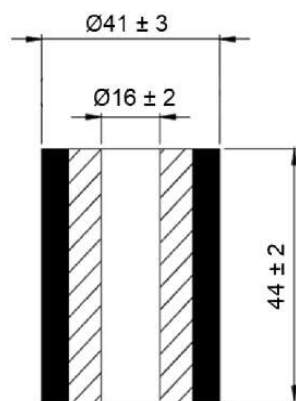

Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)