

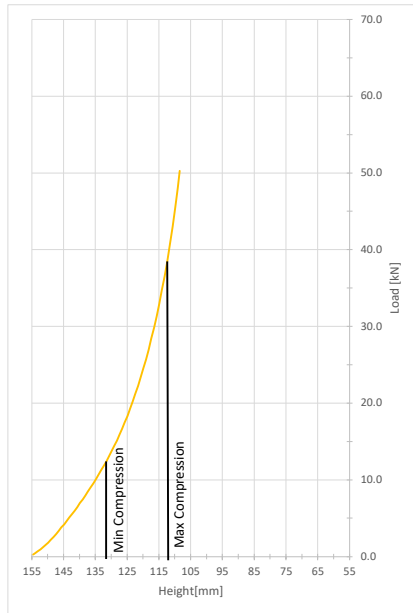


Continental SAM

DN 152 DH 152 IN 25



Compression [%]	15	20	22.5	25	27.5
Load [kN]	12.4	19.3	23.4	29.9	38.4
Height [mm]	132	124	121	117	112
Spring Rate [kN/m]	756	1116	1356	1794	2492
Effective Deflection [mm]	16	17	17	17	15
Natural Frequency [Hz]	3.9	3.8	3.8	3.9	4.0
Maximum OD [mm]	167	172	175	178	182
Weight [Kg]	2.80				

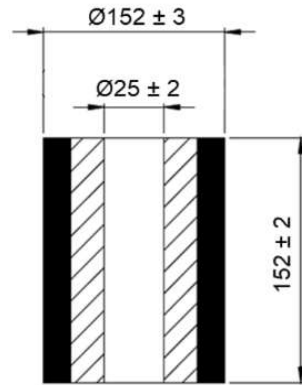

Continental SAM is the solution for spring replacement and vibration isolation. With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)