

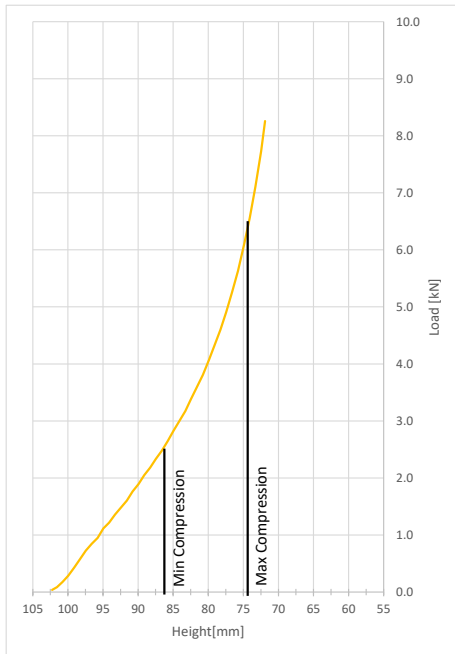


Continental SAM

DN 76 DH 102 IN 25



Compression [%]	15	20	22.5	25	27.5
Load [kN]	2.3	3.6	4.3	5.3	6.6
Height [mm]	87	82	79	77	74
Spring Rate [kN/m]	186	265	332	444	638
Effective Deflection [mm]	13	14	13	12	10
Natural Frequency [Hz]	4.5	4.3	4.4	4.6	4.9
Maximum OD [mm]	79	81	82	83	84
Weight [Kg]	0.38				

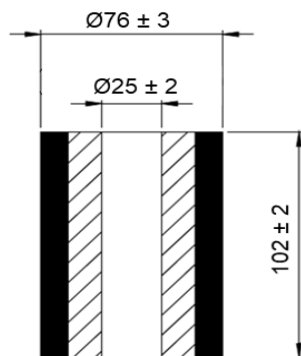

Continental SAM is the solution for spring replacement and vibration isolation. With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- › better working conditions due to a dramatically reduced noise level
- › reduced downtimes
- › compact design
- › high load-bearing capacity
- › reliable even in damp or corrosive conditions
- › maintenance-free
- › safe due to the absence of moving parts
- › reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)